



# AIR COMPRESSOR CATALOGUE

The Name You Can Trust

# **APT International**

#### About:

With Decades of experience, APT International is a global emerging brand that is determined to lead, with solid experience in Product development, manufacturing, distributing, selling, and servicing world class products. We aspire to become a global brand that is trusted by our customers for our tools, accessories, and equipment.

Believing that to build a great tool you need great materials is the driver of our manufacturing process, and for that we source the absolute best raw materials and components to build the most powerful and efficient tool for our customers to rely on.

We put our customers at the heart of everything we do, and we make sure that our wide range of products is available for them in every market we enter through a strong network of central distribution centers, local distributors, and retailers. Complemented with a vast network of service centers equipped with highly qualified technicians delivering a world class customer service quality to ensure our customers complete satisfaction.

#### Our Values:

<u>Reliability:</u> Our tools are built to last, for our customers to trust that they will consistently deliver the same quality every time.

<u>Quality:</u> We have a passionate commitment to providing high quality tools that exceed our customers' expectations.

Value for Money: Our advanced production capabilities enable us to offer our customers an unmatched combination of reliability, quality & price.

<u>Innovation</u>: We continuously strive to bring innovative solutions, for our customers to have the tools they need to get the job done.

<u>Customer Focus</u>: Our customers are at the heart of everything we do, we listen to their needs and work to deliver what they desire.

## **CONTENTS**

OIL FREE AIR COMPRESSOR

2

**DIRECT DRIVEN AIR COMPRESSOR** 

3

**BELT DRIVEN AIR COMPRESSOR** 

4-12

## **TOOL FEATURES ICONS**





**Air Displacement** 



Voltage



**Maximum Working Pressure** 



Cylinders/Stages



**Tank Capacity** 





## **SGW550**

#### Oil Free Air Compressor

Light weight and portable.

Oil free pump reduces operating and maintenance costs.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model  |     |     | 7      | <b>dir</b> | 9       |    | LxPxH    |
|--------|-----|-----|--------|------------|---------|----|----------|
|        | HP  | V   | mm     | L/min CFM  | bar psi | L  | cm       |
| SGW550 | 1.5 | 220 | 63.7x2 | 53 1.88    | 7 100   | 24 | 57x26x58 |



## SGW550x2

#### Oil Free Air Compressor

Light weight and portable.

Oil free pump reduces operating and maintenance costs.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model    |     |     | 7      | (air)     |         |    | LxPxH    |
|----------|-----|-----|--------|-----------|---------|----|----------|
|          | HP  | V   | mm     | L/min CFM | bar psi | L  | cm       |
| SGW550x2 | 1.5 | 220 | 63.5x4 | 106 3.76  | 7 100   | 50 | 90x42x74 |



#### SGW550x3

#### Oil Free Air Compressor

Light weight and portable.

Oil free pump reduces operating and maintenance costs.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

| Model    |      | <b>□</b> | 7      | đir       | <u>Q</u> |     | LxPxH     |
|----------|------|----------|--------|-----------|----------|-----|-----------|
|          | HP   | V        | mm     | L/min CFM | bar psi  | L   | cm        |
| SGW550x3 | 2.25 | 220      | 63.5x6 | 159 5.64  | 7 100    | 100 | 105x43x74 |



## **SGBM9031**

#### **Direct Driven Air Compressor**

Manufactured with high quality materials guaranteeing long lifetime and premium performance. Direct technology with easily accessible parts offering low operational cost. Lightweight and portable.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model    |    |     | 7    | àir       | Q       |    | LxPxH    |
|----------|----|-----|------|-----------|---------|----|----------|
|          | HP | V   | mm   | L/min CFM | bar psi | L  | cm       |
| SGBM9031 | 2  | 220 | 47x1 | 100 7     | 8 115   | 24 | 59x26x62 |



## **SGDB9237**

#### **Direct Driven Air Compressor**

Manufactured with high quality materials guaranteeing long lifetime and premium performance. Direct technology with easily accessible parts offering low operational cost. Lightweight and portable.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model    |     | ⊐D⊢ | 7    | đir       | Q       |    | LxPxH        |
|----------|-----|-----|------|-----------|---------|----|--------------|
|          | HP  | V   | mm   | L/min CFM | bar psi | L  | cm           |
| SGDB9237 | 1.5 | 220 | 42x1 | 72 5      | 8 115   | 12 | 59.5x22.5x46 |



#### **SGBM9037**

#### **Direct Driven Air Compressor**

Manufactured with high quality materials guaranteeing long lifetime and premium performance. Direct technology with easily accessible parts offering low operational cost. Lightweight and portable.

Suitable for working indoors due to low noise emission.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

| Model    |    |     | 7    | àir       | 2       |    | LxPxH    |
|----------|----|-----|------|-----------|---------|----|----------|
|          | HP | V   | mm   | L/min CFM | bar psi | L  | cm       |
| SGBM9037 | 2  | 220 | 42x1 | 100 5.5   | 8 115   | 24 | 59x26x62 |





## SG2055Z3

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



#### **TECHNICAL DATA**

| Model    |    | ⇉▶► | 7    | dir       | <u> </u> |    | LxPxH      |
|----------|----|-----|------|-----------|----------|----|------------|
|          | HP | V   | mm   | L/min CFM | bar psi  | L  | cm         |
| SG2055Z3 | 2  | 220 | 55x2 | 160 5.65  | 8 115    | 35 | 77.5x35x65 |

## **SGL1051**

## **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage.
Advanced cooling system concentrating the flow towards the head.
Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model      |     |     | 7    | àir       | 2       |    | LxPxH        |
|------------|-----|-----|------|-----------|---------|----|--------------|
|            | HP  | V   | mm   | L/min CFM | bar psi | L  | cm           |
| SGL1051-25 | 1.5 | 220 | 51x1 | 136 1.3   | 8 115   | 25 | 59x34.5x62   |
| SGL1051-35 | 1.5 | 220 | 51x1 | 136 1.3   | 8 115   | 35 | 77.5x34.5x62 |

## **SGY2055**

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



#### **TECHNICAL DATA**

| Model    |    | ID⊨ | 7    | àir       | <b>Q</b> |     | LxPxH     |
|----------|----|-----|------|-----------|----------|-----|-----------|
|          | HP | V   | mm   | L/min CFM | bar psi  | L   | cm        |
| SGY2055A | 2  | 220 | 55x2 | 200 7.1   | 8 115    | 50  | 93x42x74  |
| SGY2055B | 2  | 220 | 55x2 | 200 7.1   | 8 115    | 100 | 104x43x88 |
| SGY2055C | 2  | 220 | 55x2 | 200 7.1   | 8 115    | 150 | 137x44x88 |
| SGY2055D | 2  | 220 | 55x2 | 200 7.1   | 8 115    | 200 | 137x53x94 |

## **SGY2065**

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model    |    | ⇉▶► | 7    | ðir       | Q       |     | LxPxH      |
|----------|----|-----|------|-----------|---------|-----|------------|
|          | HP | V   | mm   | L/min CFM | bar psi | L   | cm         |
| SGY2065D | 3  | 220 | 65x2 | 250 8.8   | 8 115   | 200 | 137x53x94  |
| SGY2065  | 3  | 220 | 65x2 | 250 8.8   | 8 115   | 300 | 157x59x103 |



## SG1051

## **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model      |     | ID⊨ | 7    | đir       | Q       |    | LxPxH        |
|------------|-----|-----|------|-----------|---------|----|--------------|
|            | HP  | V   | mm   | L/min CFM | bar psi | L  | cm           |
| SG1051-25L | 1   | 220 | 51x1 | 35 1.3    | 8 115   | 25 | 59x34.5x62   |
| SG1051-25L | 1.5 | 220 | 51x1 | 35 1.3    | 8 115   | 25 | 59x34.5x62   |
| SG1051-35L | 1.5 | 220 | 51x1 | 35 1.3    | 8 115   | 35 | 77.5x34.5x62 |

## SG2055

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



#### **TECHNICAL DATA**

| Model        |    | <b>□</b> | 7    | dir       | 2       |     | LxPxH        |
|--------------|----|----------|------|-----------|---------|-----|--------------|
|              | HP | V        | mm   | L/min CFM | bar psi | L   | cm           |
| SG2055A-35L  | 2  | 220      | 55x2 | 200 7.1   | 8 115   | 35  | 77.5x36x66.5 |
| SG2055A-50L  | 2  | 220      | 55x2 | 200 7.1   | 8 115   | 50  | 94x42x76     |
| SG2055A-50L  | 3  | 220      | 55x2 | 200 7.1   | 8 115   | 50  | 94x42x76     |
| SG2055C-150L | 3  | 220      | 55x2 | 200 7.1   | 8 115   | 150 | 137x45x88    |
| SG2055D-200L | 2  | 220      | 55x2 | 200 7.1   | 8 115   | 200 | 137x53x94    |
| SG2055B-100L | 2  | 220      | 55x2 | 200 7.1   | 8 115   | 100 | 116x45x83    |
| SG2055B-100L | 3  | 220      | 55x2 | 200 7.1   | 8 115   | 100 | 116x45x83    |
| SG2055C-150L | 2  | 220      | 55x2 | 200 7.1   | 8 115   | 150 | 137x45x88    |

## **SGH2065**

## **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model         |    |     | 7    | dir       | <b>Q</b> |     | LxPxH      |
|---------------|----|-----|------|-----------|----------|-----|------------|
|               | HP | V   | mm   | L/min CFM | bar psi  | L   | cm         |
| SGH2065D-200L | 3  | 220 | 65x2 | 250 8.8   | 8 115    | 200 | 137x53x94  |
| SGH2065-300L  | 3  | 220 | 65x2 | 250 8.8   | 8 115    | 300 | 158x59x105 |
| SGH2065-300L  | 3  | 380 | 65x2 | 250 8.8   | 8 115    | 300 | 158x59x105 |



## SG2055/SG2065

#### Belt Driven Air Compressor Gasoline

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

Versions are specifically designed for those applications where no or not enough voltage supply is within reach. Ranging from 5 HP to 14 HP. Suitable for applications such as road construction, mining and festivals. The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



#### **TECHNICAL DATA**

| Model        |    | 7    | <b>dir</b> | Q       |     | LxPxH      |
|--------------|----|------|------------|---------|-----|------------|
|              | HP | mm   | L/min CFM  | bar psi | L   | cm         |
| SG2055M-100L | 5  | 55x2 | 200 7.1    | 8 115   | 100 | 116x43x83  |
| SG2065M-200L | 5  | 65x2 | 250 8.8    | 8 115   | 200 | 137x53x94  |
| SG2065M-300L | 5  | 65x2 | 250 8.8    | 8 115   | 300 | 158x59x105 |

## **SG2080TM**

#### Belt Driven Air Compressor Gasoline

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

Versions are specifically designed for those applications where no or not enough voltage supply is within reach. Ranging from 5 HP to 14 HP. Suitable for applications such as road construction, mining and festivals. The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model         |    | 7    | dir       | Q        |     | LxPxH      |
|---------------|----|------|-----------|----------|-----|------------|
|               | HP | mm   | L/min CFM | bar psi  | L   | cm         |
| SG2080TM-500L | 14 | 80x2 | 670 23.7  | 12.5 180 | 500 | 178x69x119 |

## SGH2065-300LV /

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model         |    |     | 7    | <b>dir</b> | 9       |     | LxPxH         |
|---------------|----|-----|------|------------|---------|-----|---------------|
|               | HP | V   | mm   | L/min CFM  | bar psi | L   | cm            |
| SGH2065-300LV | 3  | 220 | 65x2 | 250 8.8    | 8 115   | 300 | 65.4x70.4x1.6 |



## SG3065

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model  |    |     | ₹ dir |           | 9       |     | LxPxH      |
|--------|----|-----|-------|-----------|---------|-----|------------|
|        | HP | V   | mm    | L/min CFM | bar psi | L   | cm         |
| SG3065 | 4  | 220 | 65x3  | 360 12.8  | 8 115   | 500 | 178x69x119 |



#### **SG2080**

#### **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

| Model  |     |     |      |           | 9       |     | LxPxH      |
|--------|-----|-----|------|-----------|---------|-----|------------|
|        | HP  | V   | mm   | L/min CFM | bar psi | L   | cm         |
| SG2080 | 5.5 | 220 | 80x2 | 480 18    | 8 115   | 500 | 178x69x119 |





## **SGH2090**

## **Belt Driven Air Compressor**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model   |     | ID⊨ | 7    | <b>∂</b> air) | Q       |     | LxPxH      |
|---------|-----|-----|------|---------------|---------|-----|------------|
|         | HP  | V   | mm   | L/min CFM     | bar psi | L   | cm         |
| SGH2090 | 5.5 | 220 | 90x2 | 480 17        | 10 145  | 500 | 178x69x119 |
| SGH2090 | 5.5 | 380 | 90x2 | 480 17        | 10 145  | 500 | 178x69x119 |

## **SG2080T**

#### **Belt Driven Air Compressor-Two Stages**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model   |     |     | 7         | đir     | )    | Q        |     | LxPxH      |
|---------|-----|-----|-----------|---------|------|----------|-----|------------|
|         | HP  | V   | mm        | L/min ( | CFM  | bar psi  | L   | cm         |
| SG2080T | 7.5 | 380 | 80x2+65x1 | 670     | 23.7 | 12.5 180 | 500 | 178x69x119 |



## **SG1105T**

#### **Belt Driven Air Compressor-Two Stages**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

#### **TECHNICAL DATA**

| Model   |     |     | 7          | <b>dir</b> |     | Q        |     | LxPxH      |
|---------|-----|-----|------------|------------|-----|----------|-----|------------|
|         | HP  | V   | mm         | L/min C    | CFM | bar psi  | L   | cm         |
| SG1105T | 7.5 | 380 | 105x2+55x1 | 420 1      | 4.9 | 12.5 180 | 500 | 178x71x125 |



## **SG2105T**

#### **Belt Driven Air Compressor-Two Stages**

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.

| Model   |    |     | 7          | (air  |      | Q        |     | LxPxH      |
|---------|----|-----|------------|-------|------|----------|-----|------------|
|         | HP | V   | mm         | L/min | CFM  | bar psi  | L   | cm         |
| SG2105T | 10 | 380 | 105x2+55x1 | 800   | 28.3 | 12.5 180 | 500 | 178x71x125 |





## SGH2090X2

#### **Belt Driven Air Compressor**

**TWO HEADS** 

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.

The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



#### **TECHNICAL DATA**

| Model     |         | ⇉▶► | 7         | àir       | 9       |     | LxPxH      |
|-----------|---------|-----|-----------|-----------|---------|-----|------------|
|           | HP      | V   | mm        | L/min CFM | bar psi | L   | cm         |
| SGH2090X2 | 5.5+5.5 | 220 | 90x2+90x2 | 480 17    | 10 145  | 500 | 178x69x119 |

## SG3090X2

## **Belt Driven Air Compressor**

**TWO HEADS** 

Belt driven technology reduces the risk of internal parts damage. Advanced cooling system concentrating the flow towards the head. Simple start/stop automatic controls.


The compressor head is manufactured from high grade aluminum alloy, providing better heat transfer and higher tensile strength.



| Model    |         | <b>□</b> | 7         | œir e     | <u>Q</u> |     | LxPxH      |
|----------|---------|----------|-----------|-----------|----------|-----|------------|
|          | HP      | V        | mm        | L/min CFM | bar psi  | L   | cm         |
| SG3090X2 | 7.5+7.5 | 380      | 90x3+90x3 | 950 31.8  | 8 115    | 500 | 178x69x119 |

# **Check Our Range**


















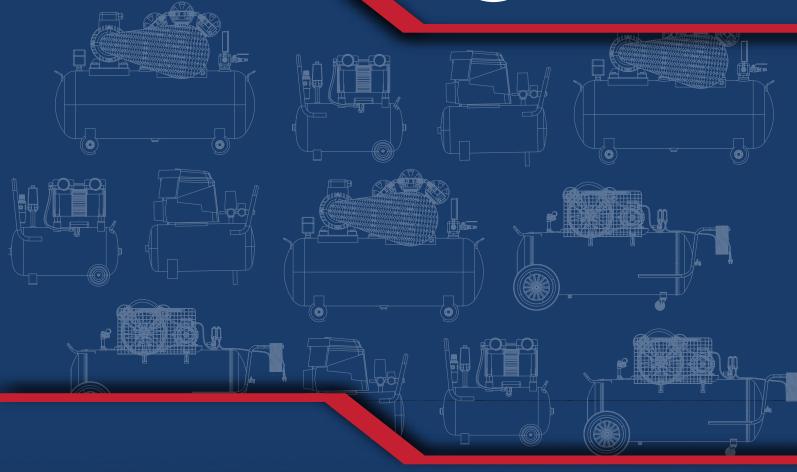

# Connect Us

><

Info@apt-international.com

