

APT



2025

HANDLING CATALOGUE

The Name You Can Trust



The Name You Can Trust

APT International

About:

With Decades of experience, APT International is a global emerging brand that is determined to lead, with solid experience in Product development, manufacturing, distributing, selling, and servicing world class products. We aspire to become a global brand that is trusted by our customers for our tools, accessories, and equipment.

Believing that to build a great tool you need great materials is the driver of our manufacturing process, and for that we source the absolute best raw materials and components to build the most powerful and efficient tool for our customers to rely on.

We put our customers at the heart of everything we do, and we make sure that our wide range of products is available for them in every market we enter through a strong network of central distribution centers, local distributors, and retailers. Complemented with a vast network of service centers equipped with highly qualified technicians delivering a world class customer service quality to ensure our customers complete satisfaction.

Our Values:

Reliability: Our tools are built to last, for our customers to trust that they will consistently deliver the same quality every time.



Quality: We have a passionate commitment to providing high quality tools that exceed our customers' expectations.

Value for Money: Our advanced production capabilities enable us to offer our customers an unmatched combination of reliability, quality & price.

Innovation: We continuously strive to bring innovative solutions, for our customers to have the tools they need to get the job done.

Customer Focus: Our customers are at the heart of everything we do, we listen to their needs and work to deliver what they desire.

KX-QDCX Electric Pallet Truck

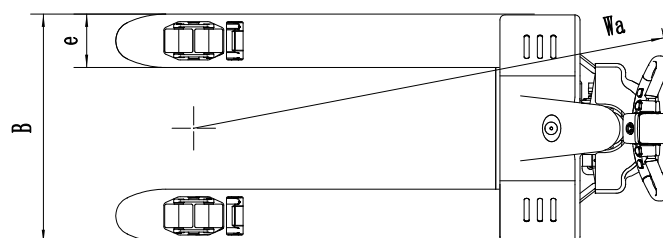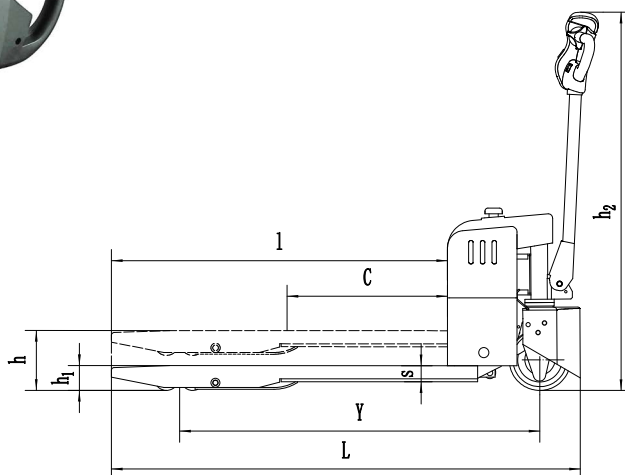


TECHNICAL DATA

Model	KX-QDCX15	KX-QDCXa15	KX-QDCXa20
Rated load	1500 kg	1500 kg	2000 kg
Fork lowest height	85 mm	85 mm	85 mm
Max. fork height	200 mm	200 mm	200 mm
Overall length	1624 mm	1610 mm	1610 mm
Wheel-base length	1270 mm	1255 mm	1255 mm
Overall width	550/685 mm	550/685 mm	550/685 mm
Fork size	1150×160×55 mm	1150×160×55 mm	1150×160×55 mm
Overall height	1225 mm	1310 mm	1310 mm
Carrying wheel	Φ80×60 mm	Φ80×60 mm	Φ80×60 mm
Driving wheel	Φ210×70 mm	Φ210×70 mm	Φ210×70 mm
Turning radius	1440 mm	1440 mm	1440 mm
Lift motor	0.8 Kw	0.8 Kw	0.8 Kw
Drive motor	0.65 Kw	0.65 Kw	1 Kw
Battery	2×12/65 V/Ah	2×12/65 V/Ah	2×12/65 V/Ah
N.W.	212 kg	210 kg	219 kg

KX-SDC

Manual Hand Pallet


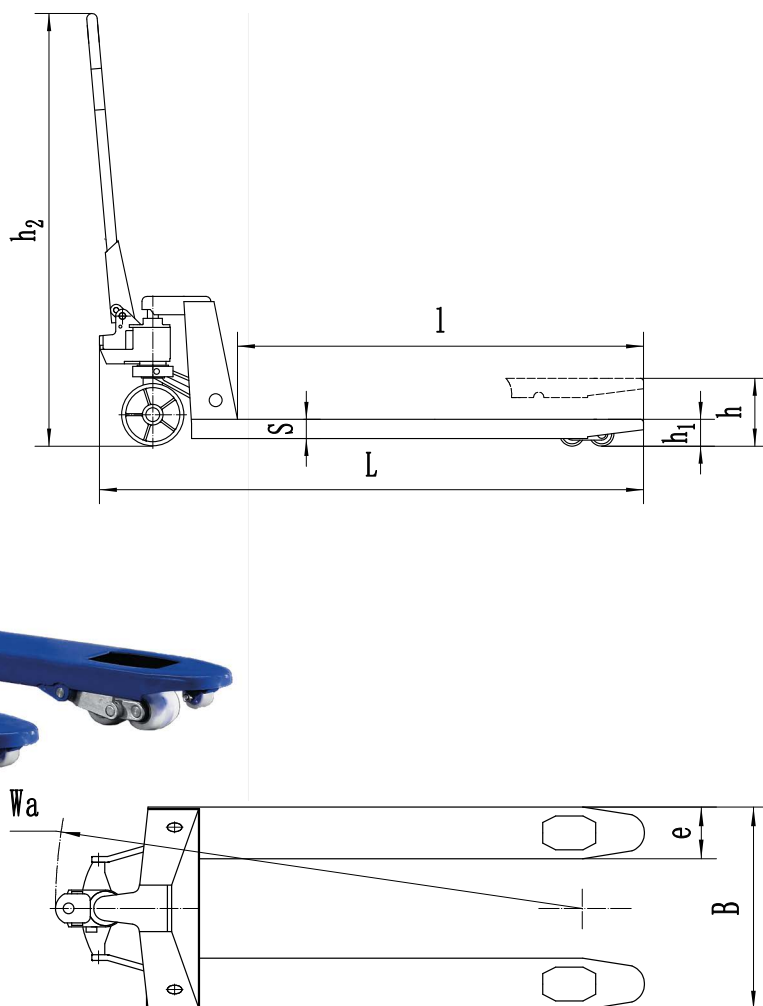


TECHNICAL DATA

Model	KX-SDC20	KX-SDC25	KX-SDC30
Rated load	2000 kg	2500 kg	3000 kg
Carrying wheel	Φ70×60 mm	Φ70×60 mm	Φ80×70 mm
Steering wheel	Φ160×50 mm	Φ160×50 mm	Φ180×50 mm
Fork lowest height	75 mm	75 mm	85 mm
Max. fork height	190 mm	190 mm	200 mm
Overall height	1185/1230 mm	1185/1230 mm	1185/1230 mm
Fork size	160×55 mm	160×55 mm	160×55 mm
Fork length	1150/1220 (500/1500/2000/2500/2850) mm		
Overall width	500/685 mm	550/685 mm	540/685 mm
Overall length	1520/1590 mm	1520/1590 mm	1530/1600 mm
N.W. PA	56.5/60 Kg	56.5/60 Kg	67.5/77 Kg
N.W. PU	58.5/63.5 Kg	60.5/64.5 Kg	72.5/82 Kg

KX-DZC

Manual Hand Pallet

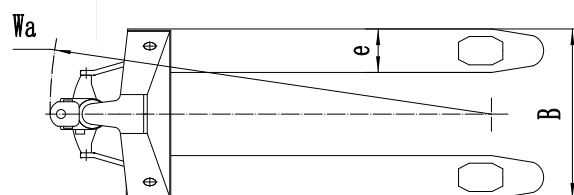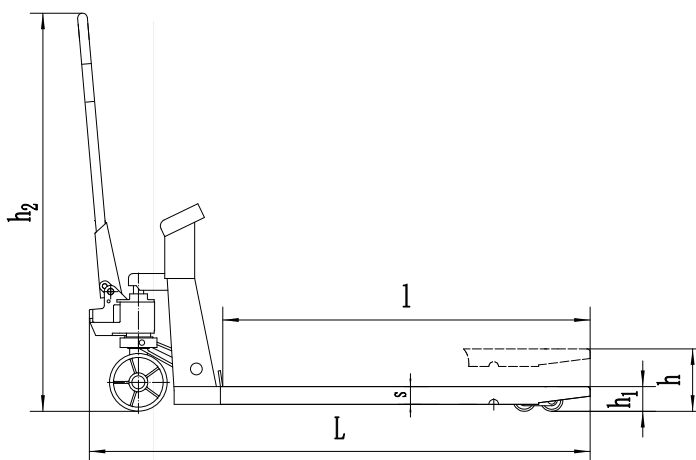


TECHNICAL DATA

Model	KX-DZC20	KX-DZC30
Rated load	2000 kg	3000 kg
Carrying wheel	Φ75×60 mm	Φ80×60 mm
Steering wheel	Φ160×50 mm	Φ180×50 mm
Fork lowest height	85 mm	88 mm
Max. fork height	200 mm	203 mm
Fork size	55/160 mm	55/160 mm
Fork length	1150/1220 mm	1150/1220 mm
Overall height	1200 mm	1200 mm
Fork width	540/685 mm	540/685 mm
Overall length	1550/1620 mm	1550/1620 mm
Battery	7.4/4 V/Ah	7.4/4 V/Ah
Battery life	40 H	40 H
Battery type	Lithium DL	Lithium DL
Display mode	LCD FS	LCD FS
N.W.	95 kg	97 kg

KX-QDC

Electric Tow Truck

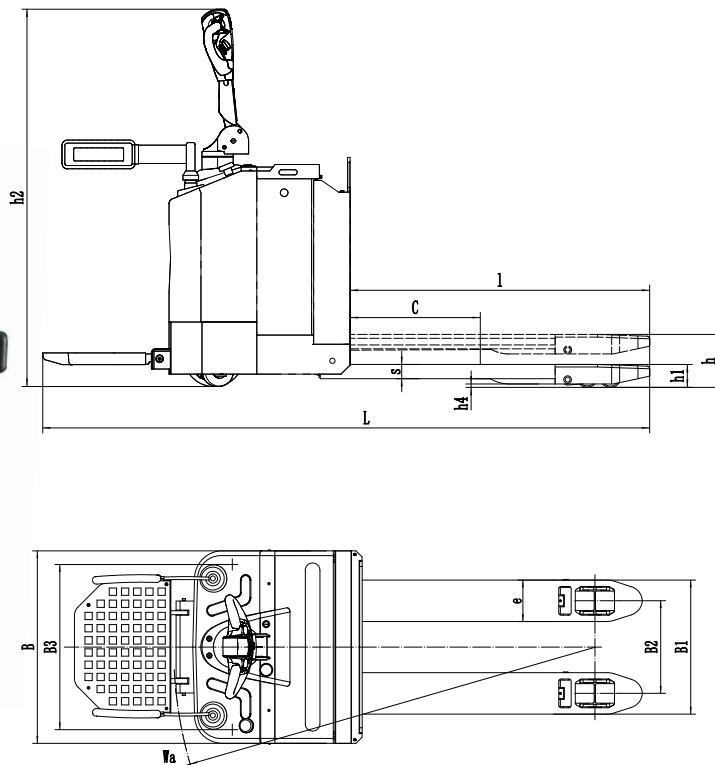


TECHNICAL DATA

Model	KX-QDC20	KX-QDC25	KX-QDC30
Rated load	2000 Kg	2500 Kg	3000 Kg
Fork lowest height	85 mm		
Max. fork height	200 mm		
Fork Size	55×160×1150 mm		
Fork Size	550/685 mm		
Overall length	2310 mm		
Overall width	790 mm		
Overall height	1450 mm		
Turning radius	1600 mm		
Carrying wheel	Φ85×80 mm		
Driving wheel	Φ85×80 mm		
Driving speed full-load	3.5 Km/h		
Lifting speed full-load	48 mm/s		
Climbing gradient full-load	4.5 mm		
Brake mode	Electromagnetic brake		
Lifting motor	2.2 Kw		
Driving motor	2.2 Kw		
Battery	24/210 V/Ah		
N.W.	540 Kg	770 Kg	800 Kg

KX-CDSS


Manual Stacker

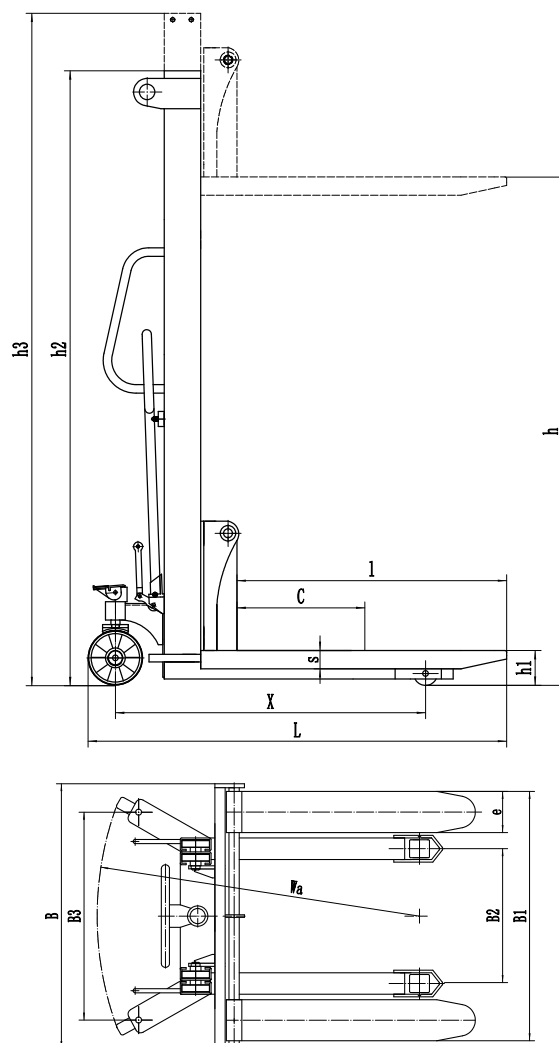

TECHNICAL DATA

Model	KX-CDSS10	KX-CDSS15	KX-CDSS20
Rated load	1000 Kg	1500 Kg	2000 Kg
Lifting height	1600/2000/2500/3000 mm		
Max. mast height	2068/2568/3068/3568 mm		
Fork length	910/1150 mm		
Fork adjustable width	340/1000 mm		
Overall length	1585 mm		
Overall width	1045 mm		
Overall height	2068/1568/1818/2068 mm		
Turning radius	1480 mm		
Carrying wheel	Φ80×70 mm		
Driving wheel	Φ180×50 mm		
Wheel base	1200 mm		
N.W.	278Kg 288Kg 310Kg 340Kg	288Kg 317Kg 340Kg 363Kg	269Kg 320Kg 343Kg 366Kg



KX-CDSD Semi-electric Stacker

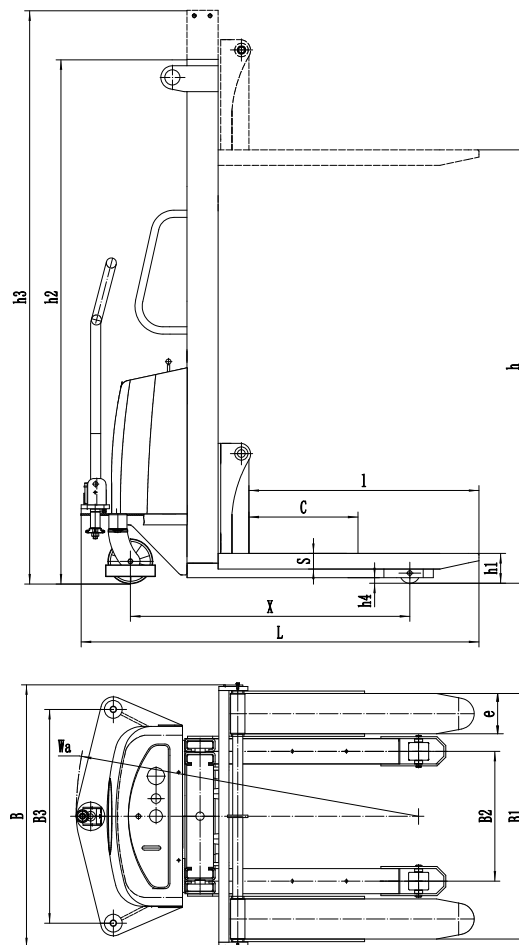

TECHNICAL DATA

Model	KX-CDSD10	KX-CDSD15	KX-CDSD20
Rated load	1000 Kg	1500 Kg	2000 Kg
Lifting height	1600/2000/2500/3000/3500 mm		
Max. mast height	2068/2568/3068/3568/4068 mm		
Fork length	910/1150 mm		
Fork adjustable width	340/1000 mm		
Overall length	1585 mm		
Overall width	1045 mm		
Overall height	2068/1568/1818/2068/2318 mm		
Turning radius	1480 mm		
Carrying wheel	Φ80×70 mm		
Driving wheel	Φ180×50 mm		
Wheel base	1200 mm		
Lifting speed full-load	100 mm/s		
Lifting motor	1.6 Kw		
Battery	12/100 V/Ah		
N.W.	330Kg 390Kg 405Kg 420Kg 435Kg	363Kg 417Kg 436Kg 458Kg 478Kg	382Kg 424Kg 444Kg 464Kg 484Kg

Check Our Range

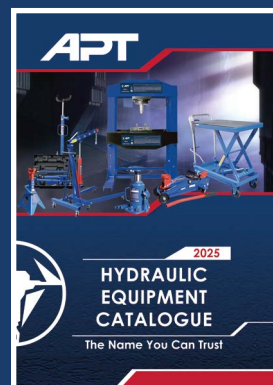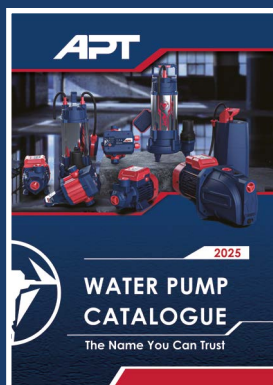


APT

The Name You Can Trust



APT

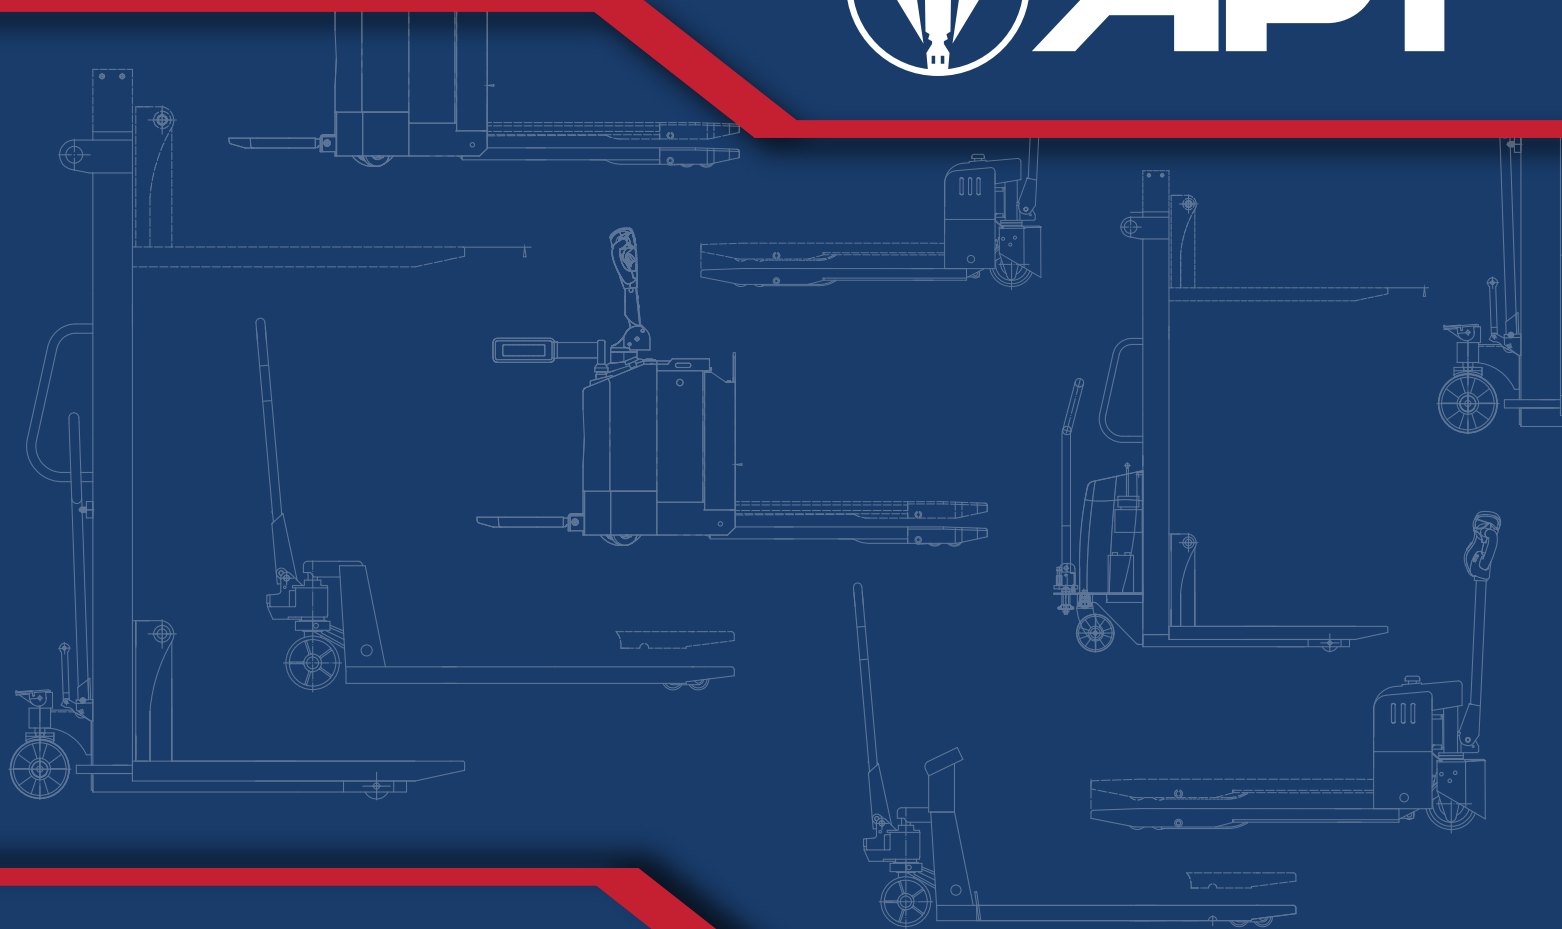

Contact Us



Info@apt-international.com

