

APT



2025

PNEUMATIC TOOLS CATALOGUE

The Name You Can Trust



The Name You Can Trust

APT International

About:

With Decades of experience, APT International is a global emerging brand that is determined to lead, with solid experience in Product development, manufacturing, distributing, selling, and servicing world class products. We aspire to become a global brand that is trusted by our customers for our tools, accessories, and equipment.

Believing that to build a great tool you need great materials is the driver of our manufacturing process, and for that we source the absolute best raw materials and components to build the most powerful and efficient tool for our customers to rely on.

We put our customers at the heart of everything we do, and we make sure that our wide range of products is available for them in every market we enter through a strong network of central distribution centers, local distributors, and retailers. Complemented with a vast network of service centers equipped with highly qualified technicians delivering a world class customer service quality to ensure our customers complete satisfaction.

Our Values:

Reliability: Our tools are built to last, for our customers to trust that they will consistently deliver the same quality every time.

Quality: We have a passionate commitment to providing high quality tools that exceed our customers' expectations.

Value for Money: Our advanced production capabilities enable us to offer our customers an unmatched combination of reliability, quality & price.

Innovation: We continuously strive to bring innovative solutions, for our customers to have the tools they need to get the job done.

Customer Focus: Our customers are at the heart of everything we do, we listen to their needs and work to deliver what they desire.

CONTENTS

Pneumatic TOOLS

PNEUMATIC REVERSIBLE DRILL 1

Pneumatic Reversible Drill 3-2

PNEUMATIC SCREWDRIVERS 4

Pneumatic Screwdrivers 5

Pneumatic Drill Drivers 6

Pneumatic Revit Gun 7

PNEUMATIC IMPACT WRENCHES 8

Pneumatic Impact Wrenches 14-9

PNEUMATIC BREAKER 15

Pneumatic Breaker 16

PNEUMATIC SANDER AND GRINDERS 17

Pneumatic Sander and Grinders 22-18

SPRAY GUNS 23

Spray Guns 28-24

TIRE GUAGE 29

Tire Guage 30

PNEUMATIC STAPLERS & NAILERS 31

Pneumatic Staplers & Nailers 37-32

STAPLES AND NAILS 38

Staples and Nails 40-38



APT

Pneumatic Reversible Drill

DW30111

Pneumatic Reversible Drill Chuck

TECHNICAL DATA

Collect	1/2" (13mm)
Free Speed	700 rpm
Overall Length	7.09" (187mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120 L/min
Pcs/Ctn	12
G.W/Ctn	19.00
Vol/Ctn	0.03



DW30112

Pneumatic Reversible Drill Keyed Chuck

TECHNICAL DATA

Collect	1/2" (13mm)
Free Speed	700 rpm
Overall Length	7.09" (187mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120 L/min
Pcs/Ctn	12
G.W/Ctn	19.00
Vol/Ctn	0.03



Pneumatic Reversible Drill

DW2210101

Pneumatic Drill Driver Keyless Chuck

TECHNICAL DATA

Collet Size	3/8" (10 mm)
No Load Speed	1460 rpm
Min. Hose Size	3/8" (10 mm)
Air Consumption	425 l/min (15 cfm)
Air Inlet Size	1/4"
Vibration Level	2.2
Noise Level	80 db
Weight	1.15 kg



Keyed Chuck Model: DW2210102

DW2210131

Pneumatic Drill Driver Keyless Chuck

TECHNICAL DATA

Collet Size	1/2" (13 mm)
No Load Speed	1460 rpm
Min. Hose Size	3/8" (10 mm)
Air Consumption	425 l/min (15 cfm)
Air Inlet Size	1/4"
Vibration Level	2.2
Noise Level	80 db
Weight	1.76 kg



Keyed Chuck Model: DW2210132

Pneumatic Drill Drivers



The Name
You Can Trust

Pneumatic Screwdrivers

DW30206

TECHNICAL DATA

Capacity	6-8mm
Max. torque	52 ft-lb (70 min)
Noload speed	9000 rpm
Overall Length	7.68" (195mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	2 cfm (57L/min)
Net weight	1.55 lb(0.75kg)



DW30208

TECHNICAL DATA

Capacity	6-8mm
Max. torque	59 ft-lb (80 min)
Noload speed	10500 rpm
Overall Length	7.68" (195mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	2 cfm (57L/min)
Net weight	2.48 Lb(1.12kg)



DW30210

TECHNICAL DATA

Capacity	8-10mm
Max. torque	89 ft-lb (120 min)
Noload speed	9000 rpm
Overall Length	8.66" (220mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	3 cfm (85L/min)
Net weight	2.2 Lb(1kg)



DW1105030

TECHNICAL DATA

Torque Range	5-30 N.m. (3.7-22 ft.lb.)
No Load Speed	11000 rpm
Max. Torque	30 N.m. (22 ft.lb.)
Air Consumption	57 l/min (2 cfm)
Air Inlet Size	1/4"
Bolt Capacity	5 mm
Length	195 mm
Weight	0.7 kg



DW1105045

TECHNICAL DATA

Torque Range	5-45 N.m. (3.7-33 ft.lb.)
No Load Speed	12000 rpm
Max. Torque	45 N.m. (33 ft.lb.)
Air Consumption	57 l/min (2 cfm)
Air Inlet Size	1/4"
Bolt Capacity	5 mm
Length	195 mm
Weight	0.78 kg



DW1205050

TECHNICAL DATA

Torque Range	5-50 N.m. (3.7-37 ft.lb.)
No Load Speed	12000 rpm
Max. Torque	50 N.m. (37 ft.lb.)
Air Consumption	57 l/min (2 cfm)
Air Inlet Size	1/4"
Bolt Capacity	5 mm
Length	195 mm
Weight	0.7 kg





DW1310200

TECHNICAL DATA

Torque Range	20-200 N.m. (14.7-146 ft.lb.)
No Load Speed	11000 rpm
Max. Torque	200 N.m. (146 ft.lb.)
Air Consumption	85 l/min (3 cfm)
Air Inlet Size	1/4"
Bolt Capacity	6-10 mm
Length	225 mm
Weight	1.3 kg



DW1412220

TECHNICAL DATA

Torque Range	20-220 N.m. (14.7-161 ft.lb.)
No Load Speed	11000 rpm
Max. Torque	220 N.m. (161 ft.lb.)
Air Consumption	85 l/min (3 cfm)
Air Inlet Size	1/4"
Bolt Capacity	10-12 mm
Length	225 mm
Weight	1.5 kg



DW1703002

TECHNICAL DATA

Torque Range	0.3-2.0 N.m.
No Load Speed	2200 rpm
Recommended Air Pressure	6.0 kg/cm ²
Air Consumption	0.28 m ³ /min
Accuracy %	±3
Bolt Capacity (Regular Screws)	M2.2-4.5
Bolt Capacity (Self-tapping Screws)	M1.7-3.5
Length	180 mm
Weight	0.48 kg



DW1704004

TECHNICAL DATA

Torque Range	0.3-4.0 N.m.
No Load Speed	800 rpm
Recommended Air Pressure	6.0 kg/cm ²
Air Consumption	0.30 m ³ /min
Accuracy %	±3
Bolt Capacity (Regular Screws)	M3.3-5.7
Bolt Capacity (Self-tapping Screws)	M2.7-4.4
Length	180 mm
Weight	0.48 kg



Pneumatic Revit Gun

DW4331720

Pneumatic Micro Die Grinder

TECHNICAL DATA

Collet Size	1/8" (3 mm)
No Load Speed	54000 rpm
Vent Pipe	3/8" (10 mm)
Air Consumption	57 l/min (2 cfm)
Air Inlet Size	1/4"
Working Pressure	90 psi



DW8215140

Pneumatic Rivet Gun

TECHNICAL DATA

Bolt Capacity	2.4-4.8 mm
Recommended Air Pressure	6.3 kg/cm ²
Min. Hose Size	3/8" (10 mm)
Air Consumption	113 l/min (4 cfm)
Air Inlet Size	1/4"
Traction Power	7400-10400 N
Weight	1.35 kg





Pneumatic Impact Wrenches



The Name
You Can Trust

Pneumatic Impact Wrenches

DW30301

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.63" (16mm)
Max. Torque	471 ft-lb / 640 N.m
Free Speed	7500 rpm
Overall Length	7.48" (190mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120 L/min
Pcs/Ctn	8
G.W/Ctn	24.00
Vol/Ctn	0.03



- Comes with mini Oiler

DW30301K

Pneumatic Impact Wrench KIT

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.63" (16mm)
Max. Torque	471 ft-lb / 640 N.m
Free Speed	7500 rpm
Overall Length	7.48" (190mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120 L/min
Pcs/Ctn	5
G.W/Ctn	25.00
Vol/Ctn	0.05



- Comes with mini Oiler
- 13 Pcs kit



APT

Pneumatic Impact Wrenches

DW30302

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.63" (18mm)
Max. Torque	625 ft-lb/850 N.m
Free Speed	8000 rpm
Overall Length	7.48" (190mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120L/min
Pcs/Ctn	8
G.W/Ctn	25.00
Vol/Ctn	0.03



- Comes with mini Oiler

DW30303

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.71" (18mm)
Max. Torque	625 ft-lb/850 N.m
Free Speed	7000 rpm
Overall Length	7.48" (190mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120L/min
Pcs/Ctn	8
G.W/Ctn	25.00
Vol/Ctn	0.03



- Comes with mini Oiler

Pneumatic Impact Wrenches

DW30303K

Pneumatic Impact Wrench KIT

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.71" (18mm)
Max. Torque	625 ft-lb/850 N.m
Free Speed	7000 rpm
Overall Length	7.48" (190mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120L/m
Pcs/Ctn	5
G.W/Ctn	25.00
Vol/Ctn	0.05



- Comes with mini Oiler
- 13 Pcs kit

DW30305

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.71" (18mm)
Max. Torque	735 ft-lb/1000 N.m
Free Speed	6000 rpm
Overall Length	9.27" (230mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120L/m
Pcs/Ctn	8
G.W/Ctn	25.00
Vol/Ctn	0.04



- Comes with mini Oiler



APT

Pneumatic Impact Wrenches

DW30305K

Pneumatic Impact Wrench KIT

TECHNICAL DATA

Square Drive	1/2"
Capacity Bolt Size	0.71" (18mm)
Max. Torque	735 ft-lb/1000 N.m
Free Speed	6000 rpm
Overall Length	9.27" (230mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	120L/m
Pcs/Ctn	5
G.W/Ctn	25.00
Vol/Ctn	0.04



- Comes with mini Oiler
- 13 Pcs kit

DW30311

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	3/4"
Capacity Bolt Size	0.83" (21mm)
Max. Torque	956 ft-lb/1300 N.m
Free Speed	5000 rpm
Overall Length	8.86" (220mm)
Air Inlet(PT)	3/8"
Air Hose(I.D.)	1/2"
Air Consumption	220L/min
Pcs/Ctn	4
G.W/Ctn	21.00
Vol/Ctn	0.05



- Short Anvil

Pneumatic Impact Wrenches

DW30313

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	3/4"
Capacity Bolt Size	1.40" (36mm)
Max. Torque	1540 ft-lb/2000 N.m
Free Speed	4300 rpm
Overall Length	8.86" (220mm)
Air Inlet(PT)	3/8"
Air Hose(I.D.)	1/2"
Air Consumption	220L/m
Pcs/Ctn	2
G.W/Ctn	17.00
Vol/Ctn	0.04



- Short Anvil

DW30320

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1"
Capacity Bolt Size	1.26" (32mm)
Max. Torque	735 ft-lb/2400 N.m
Free Speed	4300 rpm
Overall Length	13.39" (340mm)
Air Inlet(PT)	1/2"
Air Hose(I.D.)	1/2"
Air Consumption	250L/min
Pcs/Ctn	2
G.W/Ctn	24.50
Vol/Ctn	0.06



- Short Anvil
- Comes with mini Oiler

**APT**

Pneumatic Impact Wrenches

DW30321

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1"
Capacity Bolt Size	1.77" (45mm)
Max. Torque	1912 ft-lb/2600 N.m
Free Speed	4000 rpm
Overall Length	21.26" (540mm)
Air Inlet(PT)	1/2"
Air Hose(I.D.)	1/2"
Air Consumption	250L/m
Pcs/Ctn	2
G.W/Ctn	30.00
Vol/Ctn	0.05



- Long Anvil
- D-handle (internal Trigger)

DW30322

Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1"
Capacity Bolt Size	1.77" (45mm)
Max. Torque	2353 ft-lb /3200 N.m
Free Speed	3500 rpm
Overall Length	24.21" (615mm)
Air Inlet(PT)	1/2"
Air Hose(I.D.)	1/2"
Air Consumption	380L/m
Pcs/Ctn	1
G.W/Ctn	19.00
Vol/Ctn	0.03



- Long Anvil

DW30323


Pneumatic Impact Wrench

TECHNICAL DATA

Square Drive	1"
Capacity Bolt Size	1.77" (45mm)
Max. Torque	2647 ft-lb/3600 N.m
Free Speed	3000 rpm
Overall Length	24.61" (625mm)
Air Inlet(PT)	1/2"
Air Hose(I.D.)	1/2"
Air Consumption	380L/m
Pcs/Ctn	1
G.W/Ctn	21.50
Vol/Ctn	0.03



- Long Anvil

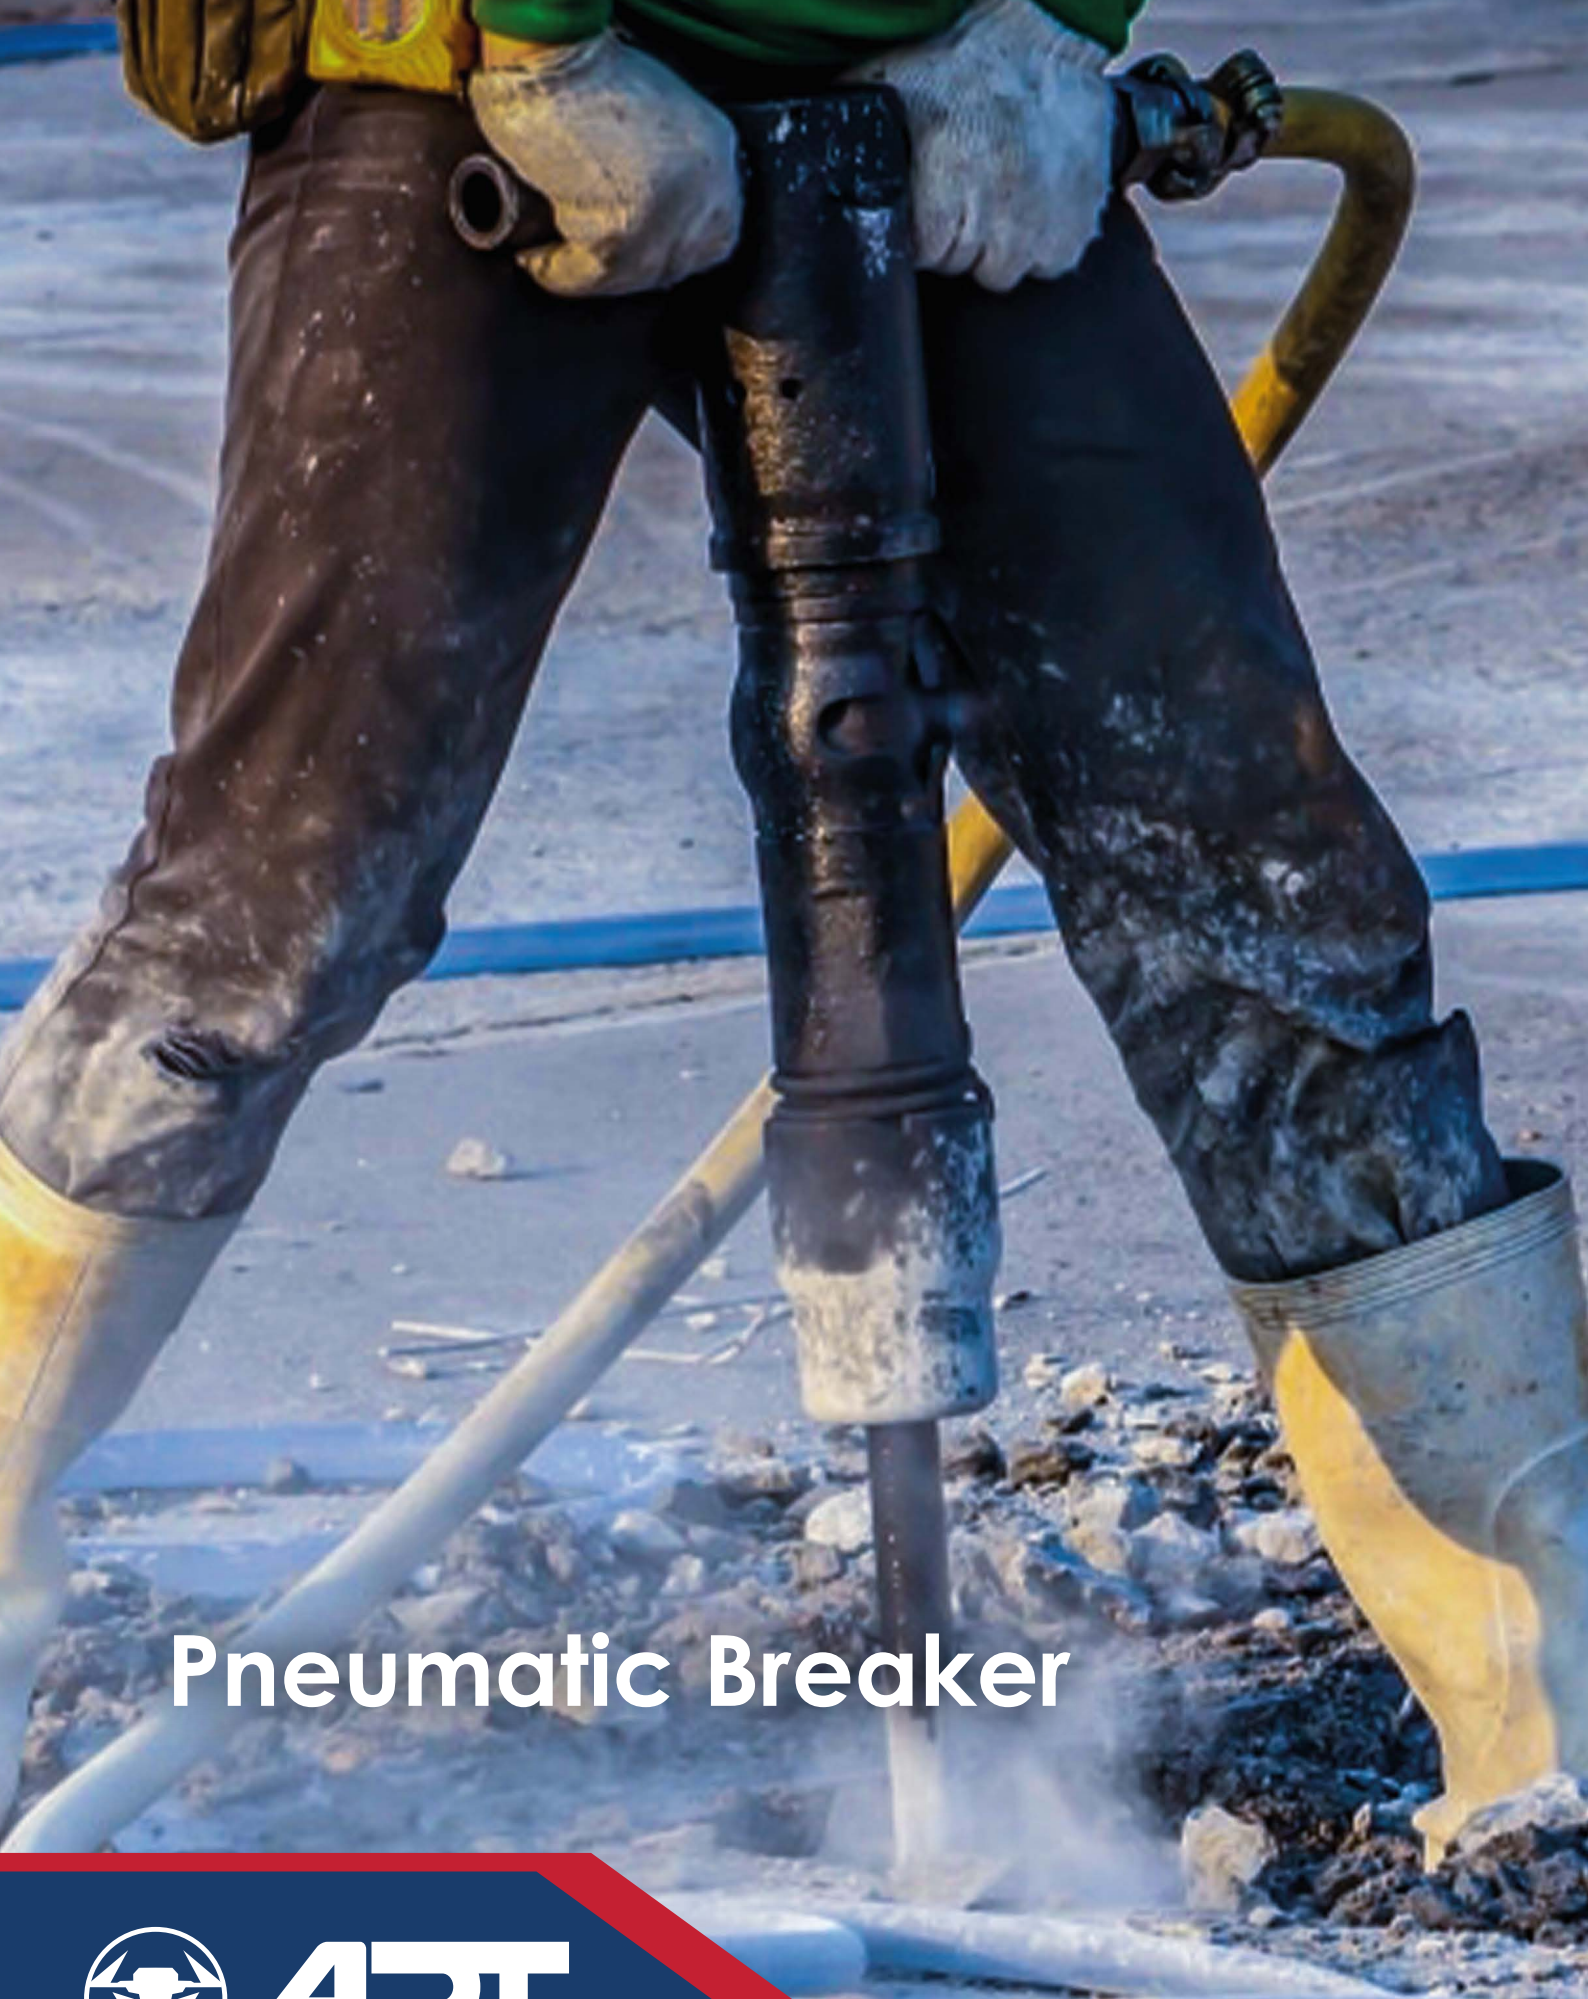

Pneumatic Breaker



APT

**The Name
You Can Trust**



APT

Pneumatic Breaker

DW30201

Pneumatic Breaker

TECHNICAL DATA

Length	575mm
Net Weight	10.9kg
Rammer Dia.	38mm
Rammer Stroke	155.00mm
Ramme Weight	0.9kgs
Air pressure	0.63 Mpa
Impact Energy(0.49Mpa)	≥ 43 J
Impact Frequency(0.49Mpa)	≥ 16 Hz
Air Consumption(0.49Mpa)	≥ 26 L/sec
Air Pipe Inner Dia.	16.00mm
Pcs/Ctn	1
G.W/Ctn	10.00
Vol/Ctn	0.01



DW30204

Pneumatic Breaker

TECHNICAL DATA

Length	570mm
Net Weight	20kg
Rammer Dia.	40mm
Rammer Stroke	165.00mm
Ramme Weight	0.9kgs
Air pressure	0.63 Mpa
Impact Energy(0.49Mpa)	≥ 60 J
Impact Frequency(0.49Mpa)	≥ 16 Hz
Air Consumption(0.49Mpa)	≥ 23 L/sec
Air Pipe Inner Dia.	16.00mm
Pcs/Ctn	1
G.W/Ctn	20.00
Vol/Ctn	0.03



DW30211

Pneumatic Breaker

TECHNICAL DATA

Length	733mm
Net Weight	37kgs
Rammer Dia.	57mm
Rammer Stroke	189.00mm
Ramme Weight	0.9kgs
Air pressure(Mpa)	0.63
Impact Energy(0.49Mpa)	≥ 60 J
Impact Frequency(0.49Mpa)	≥ 18.3 Hz
Air Consumption(0.49Mpa)	34 L/sec
Air Pipe Inner Dia.	19.00mm
Pcs/Ctn	1
G.W/Ctn	40
Vol/Ctn	0.07





Pneumatic Sander and Grinders



The Name
You Can Trust



DW30703

Pneumatic Sander Vacuum

TECHNICAL DATA

Sanding Pad	5" (125mm)
Free Speed	10000 rpm
Overall Length	5.6" (135.4mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	9 cfm (255L/min)
Pcs/Ctn	12
G.W/Ctn	18.00
Vol/Ctn	0.06



DW30707

Pneumatic Sander Vacuum

TECHNICAL DATA

Sanding Pad	6" (150mm)
Free Speed	10000 rpm
Overall Length	8.0" (193.60mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	9 cfm (255L/min)
Pcs/Ctn	12
G.W/Ctn	18.00
Vol/Ctn	0.07



Pneumatic Sander and Grinders

DW7112500

Pneumatic Sanders

TECHNICAL DATA

Pad Diameter	5" (125 mm)
No Load Speed	10000 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	No
Weight	0.97 kg



DW7112550

Pneumatic Sanders (Vacuum Ready)

TECHNICAL DATA

Pad Diameter	5" (125 mm)
No Load Speed	10000 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	Yes
Weight	0.97 kg





APT

Pneumatic Sander and Grinders

DW7312500

Pneumatic Sanders

TECHNICAL DATA

Pad Diameter	5" (125 mm)
No Load Speed	12000 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	No
Weight	0.83 kg



DW7312550

Pneumatic Sanders (Vacuum Ready)

TECHNICAL DATA

Pad Diameter	5" (125 mm)
No Load Speed	10500 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	Yes
Weight	0.93 kg



Pneumatic Sander and Grinders

DW7315000

Pneumatic Sanders

TECHNICAL DATA

Pad Diameter	6" (150 mm)
No Load Speed	12000 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	No
Weight	0.83 kg



DW7315050

Pneumatic Sanders (Vacuum Ready)

TECHNICAL DATA

Pad Diameter	5" (125 mm)
No Load Speed	10500 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	Yes
Weight	0.93 kg



**APT**

Pneumatic Sander and Grinders

DW7515050**Pneumatic Sanders (Vacuum Ready)****TECHNICAL DATA**

Pad Diameter	6" (150 mm)
No Load Speed	10500 rpm
Orbit Diameter	3/16" (5 mm)
Air Consumption	226 l/min (8 cfm)
Air Inlet Size	1/4"
Rated Power	0.2 hp (0.15 KW)
Vacuum Ready	Yes
Weight	0.93 kg

**DW30601KIT****Pneumatic Mini Die Grinder KIT****TECHNICAL DATA**

Capacity	1/4" (6.35mm)
Free Speed	25000 rpm
Overall Length	5.71" (145mm)
Air Inlet(PT)	1/4"
Air Hose(I.D.)	3/8"
Air Consumption	3 cfm (85L/min)
Pcs/Ctn	20
G.W/Ctn	15.00
Vol/Ctn	0.06

DW4152310**Pneumatic Die Grinder****16 Pcs Kit:
DW4152320****TECHNICAL DATA**

Torque Range	3/3.15/6/6.35
No Load Speed	25000 rpm
Min. Hose Size	3/8" (10 mm)
Air Consumption	85 l/min (3 cfm)
Air Inlet Size	1/4"
Length	138 mm
Noise Level	82 db.
Weight	0.3 kg

Spray Guns



APT

The Name
You Can Trust

Mini Spray gun V-3



TECHNICAL DATA

Fluid Nozzle	0.5mm
Air pressure	50 PSI
Capacity of Cup	125 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	47×35.5×29 cm

Spray gun H-2000



TECHNICAL DATA

Fluid Nozzle	0.5mm
Air pressure	43 PSI
Capacity of Cup	125 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	38×36.5×24 cm

Spray gun AB-17G



TECHNICAL DATA

Fluid Nozzle	(1.4/1.6/2.5) mm
Air pressure	43 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	84.5×49×16 cm

Spray gun F-75G



TECHNICAL DATA

Fluid Nozzle	1.5/2.5 mm
Air pressure	50 PSI
Capacity of Cup	400 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	84.5×44×27 cm

Gravity Feed mini Spray gun F-2



TECHNICAL DATA

Fluid Nozzle	0.5 mm
Air pressure	50 PSI
Capacity of Cup	125 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	46×34×29 cm

Spray gun G-80



TECHNICAL DATA

Fluid Nozzle	(1.8/2.5/3.0) mm
Air pressure	50 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	74.5×46.5×27 cm

Spray Guns

Spray gun S-990G



TECHNICAL DATA

Fluid Nozzle	1.5/2.5 mm
Air pressure	50 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	68.5×47.5×26 cm

Spray gun 4001B



TECHNICAL DATA

Fluid Nozzle	(1.4/1.7/2/2.5 mm)
Air pressure	50 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	77×23×30 cm

Spray gun P-827



TECHNICAL DATA

Fluid Nozzle	1.4 mm
Air pressure	43 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	66×24×29 cm

Spray gun H-827



TECHNICAL DATA

Fluid Nozzle	1.4 mm
Air pressure	43 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	62×24×28 cm

Spray gun HK-827



TECHNICAL DATA

Fluid Nozzle	1.4 mm
Air pressure	43 PSI
Capacity of Cup	600 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	62×24×28 cm

Spray gun FR-301



TECHNICAL DATA

Fluid Nozzle	(4/6/8) mm
Air pressure	50 PSI
Capacity of Cup	6000 ML
Feed Type	Gravity
Air Inlet	G 1/4"
Carton size (6pcs/ctn)	74×50×35 cm



Spray gun 4001S



TECHNICAL DATA

Fluid Nozzle	(1.6/1.7/1.8) mm
Air pressure	50 PSI
Capacity of Cup	1000 ML
Feed Type	Suction
Air Inlet	G 1/4"
Carton size (10pcs/ctn)	57×38×32 cm

Spray gun AB-17S



TECHNICAL DATA

Fluid Nozzle	(1.6/1.8/2.5) mm
Air pressure	50 PSI
Capacity of Cup	1000 ML
Feed Type	Suction
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	84.5×49×16 cm

Spray gun S-990S



TECHNICAL DATA

Fluid Nozzle	1.8 mm
Air pressure	50 PSI
Capacity of Cup	750 ML
Feed Type	Suction
Air Inlet	G 1/4"
Carton size (20pcs/ctn)	56×36×54.5 cm

Sandblast gun PS-4



TECHNICAL DATA

Rated Pressure	70PSI
Max Pressure	≤ 150PSI
Carton size (10pcs/ctn)	59×37.5×24cm

Body Washing Gun DO-10



TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	90PSI
Max Pressure	≤ 150PSI
Capacity	600cc
Carton size (20pcs/ctn)	59×43.5×45 cm

Body Washing Gun DG-10-EC



TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	90PSI
Max Pressure	≤ 150PSI
Capacity	750cc
Carton size (20pcs/ctn)	59×43.5×45 cm

Spray Guns

Air Duster Gun DG-10S-1



Air Duster Gun DG-10S-2



Air Duster Gun K-601-2



Air Duster Gun K-601-3



Air Duster Gun BG-1

Convenient hanging hook for ease of storage
Comfortable vinyl coated control lever
Chrome plated zinc body
1/4 NPT Blow Gun



PISTOLET LAVAGE EAU H.P SG2 VOYLET APT





Air Silicon Adhesive Gun V-103



TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	70PSI
Max Pressure	≤ 140PSI
Carton size (10pcs/ctn)	36×33×34.5 cm

Air grease gun HYQ-11



TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	70PSI
Max Pressure	≤ 140PSI
Carton size (10pcs/ctn)	47.5×41×32 cm

Tire Guage



APT

The Name
You Can Trust



TG-5

Tire Inflator With Guage 63mm

TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	150PSI
Max Pressure	≤ 220PSI
Carton size (10pcs/ctn)	57×29×28 cm



DG-10Y

Tire Inflating Guns

Comfortable pistol grip
Rubber protected 2 inch gauge
Measuring range from 10 up to 220 Psi
Flexible 1-foot long hose with a brass lock-on air chuck for ease of use
G1/4" air inlet

TECHNICAL DATA

Air inlet	G 1/4"
Rated Pressure	150PSI
Max Pressure	≤ 220PSI
Carton size (20pcs/ctn)	44×34×23 cm



TB-1



TB-2



Pneumatic Staplers & Nailers



The Name
You Can Trust



APT


Pneumatic Staplers & Nailers

1013J-DC407

Fine Wire stapler

FEATURES

- 360° exhaust direction
- Light die cast body of aluminum alloy
- Extremely easy jam clearing design
- Bottom loading system



1.2mm x 0.6mm
(0.047") (0.024")
Gauge: 20



TECHNICAL DATA

Operating Pressure	4~7 kg/cm ²
Loading Capacity	100 Staples
Tool Dimensions	215x45x150 mm (8.46x1.77x5.91 in)
Tool Weight	0.85 kg (1.87 lbs.)

20_{GA}
STAPLE

Main Applications



1022J-GF307

Medium Crown Stapler

FEATURES

- Light die cast body of aluminum alloy
- Bottom loading system
- Extremely easy jam clearing design
- Depth control system



1.2mm x 0.6mm
(0.047") (0.024")
Gauge: 20



TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	100 Staples
Tool Dimensions	240x55x165 mm (9.45x2.17x6.50 in.)
Tool Weight	1.25 Kg (2.75 lbs)

20_{GA}
STAPLE

Main Applications




Pneumatic Staplers & Nailers

8016-DC407

Fine wire stapler

FEATURES

- 360° exhaust direction
- Light die cast body of aluminum alloy
- Extremely easy jam clearing design
- Bottom loading system



TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	125 Staples
Tool Dimensions	215x50x165 mm (8.46x1.77x5.91 in.)
Tool Weight	0.89 Kg (1.96 lbs)

21_{GA}
STAPLE

Main Applications




8416-DC407

Fine wire stapler

FEATURES

- 360° exhaust direction
- Light die cast body of aluminum alloy
- Extremely easy jam clearing design
- Bottom loading system



TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	100 Staples
Tool Dimensions	215x50x165 mm (8.46x1.97x6.50 in.)
Tool Weight	0.89 Kg (1.96 lbs)

21_{GA}
STAPLE

Main Applications





APT

Pneumatic Staplers & Nailers

F32-GH201


Brad Nailer

FEATURES

- "Contact mode" safety system
- Light die cast body of aluminum alloy
- Side loading system
- Remain nails display available

TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	100 Staples
Tool Dimensions	250x58x185 mm (9.84x2.28x7.28 in.)
Tool Weight	1.08 Kg (2.38 lbs)



Head: 2mm(0.079")
 1.25mmx1.05mm
 (0.050") (0.041")
 Gauge: 18



18^{GA}
STAPLE

Main Applications



F50-CB101

Brad Nailer

FEATURES

- 360° exhaust direction
- "Contact mode" safety system
- Light die cast body of aluminum alloy
- Traditional quick release design
- Side loading system
- Remain Nails display available

TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ² (60~100 Psi)
Loading Capacity	100 Nails
Tool Dimensions	255x55x245 mm (10.04x2.17x9.65 in.)
Tool Weight	1.42 Kg (3.13 lbs)



Head: 2mm(0.079")
 1.25mmx1.05mm
 (0.050") (0.041")
 Gauge: 18



18^{GA}
STAPLE

Main Applications



Pneumatic Staplers & Nailers

ST64-AE202

Heavy Duty Concrete Nailer

FEATURES

- 360° exhaust direction
- "Partial sequential mode" safety system
- Light die cast body of aluminum alloy
- Side loading system
- Remain nails display available

TECHNICAL DATA

Operating Pressure	5~7.5 Kg/cm ²
Loading Capacity	50 Nails
Tool Dimensions	330x103x285 mm (12.99x4.05x11.22 in.)
Tool Weight	2.65 Kg (5.83 lbs)



21^{GA}
STAPLE

Main Applications



P630-DC203


Headless Pin Nailer

FEATURES

- 360 exhaust direction
- "Contact mode" safety system
- Light die cast body of aluminum alloy
- Side loading design
- Automatic length adjust system
- Remain nails display available
- Non-marring tip available

TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	100 Nails
Tool Dimensions	215x48x183 mm (8.46x1.97x6.50 in.)
Tool Weight	0.95 Kg (2.09 lbs)



21^{GA}
STAPLE

Main Applications





APT

Pneumatic Staplers & Nailers

9025-GF307


Narrow Crown Stapler

FEATURES

- Light die cast body of aluminum alloy
- Bottom loading system
- Remain Nails display available

TECHNICAL DATA

Operating Pressure	4~7 Kg/cm ²
Loading Capacity	100 Staples
Tool Dimensions	240x55x178 mm (9.45x2.17x7.01 in.)
Tool Weight	0.30 Kg (2.86 lbs)

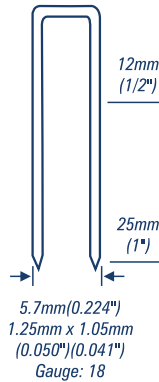

20^{GA}
STAPLE

Main Applications



CN70-MX213

Coil Nailer

FEATURES


- "Contact mode" safety system
- "Sequential mode" can be available by changing trigger
- Light die cast body of aluminum alloy
- Use 15° wire collated coil nails
- Side loading system
- Easy length adjust design

APPLICATIONS

Pallets - Creating - Fences
Packaging - Decking

TECHNICAL DATA

Operating Pressure	5~7.5 Kg/cm ²
Loading Capacity	225~300 Nails
Tool Dimensions	306x128x315 mm (12.05x5.04x12.40 in.)
Tool Weight	3.55 Kgs (7.81 lbs)

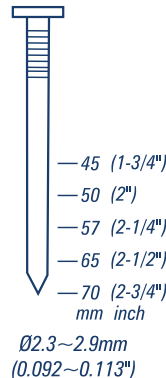

20^{GA}
STAPLE

Main Applications



Pneumatic Staplers & Nailers

CN90-HK213

Coil Nailer

FEATURES


- 360° exhaust direction
- "Contact mode" safety system-rapid fire
- "Sequential mode" can be available by changing trigger
- Light die cast body of aluminum alloy
- Use 15° wire collated coil nails
- Side loading system
- Easy length adjust design
- Non-marring tip available

APPLICATIONS

Heavy duty Pallets and Crating
Packaging

TECHNICAL DATA

Operating Pressure	5~7.5 Kg/cm ²
Loading Capacity	300 Nails
Tool Dimensions	376x145x375 mm (14.80x5.71x14.76 in.)
Tool Weight	4.4 Kgs (9.68 lbs)

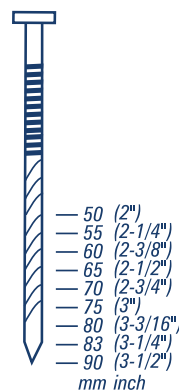

Ø2.5~3.3mm
(0.098~0.130")




20^{GA}
STAPLE

Main Applications





Fine wire staple 10F Series

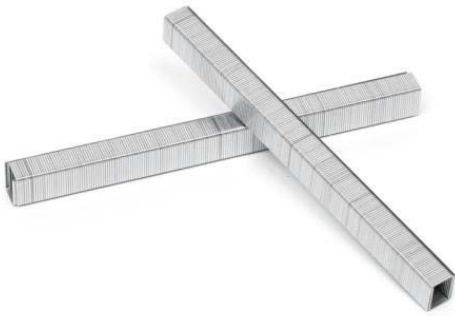

23^{GA}
STAPLE

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
11.2mm	0.75mm	0.54mm	3-14mm	10m

Fine wire staple 4J Series




20^{GA}
STAPLE

Finish: Galvanized/ Galv.yellow/ss
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
5.1mm	1.15mm	0.57mm	4-25mm	5m

Heavy wire staple N Series

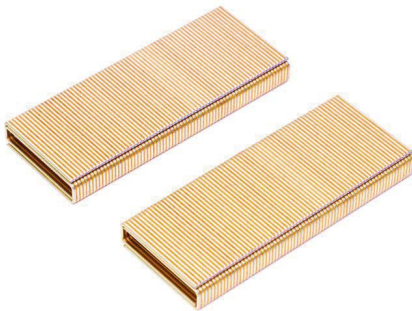

16^{GA}
STAPLE

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
10.55mm	1.58mm	1.3mm	12-50mm	10m

Fine wire staple 10J Series



20^{GA}
STAPLE

Finish: Galvanized/ Galv.yellow/ss
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
11.2mm	1.15mm	0.57mm	4-25mm	5m

Fine wire staple 8H Series



21^{GA}
STAPLE

Finish: Galvanized/ SS
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
12.3mm	0.75mm	0.54mm	4-16mm	10m

Industrial staple 90 Series



18^{GA}
STAPLE

Finish: Galvanized/ Galv.yellow/ss
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
5.7mm	1.25mm	1mm	10-45mm	5m

Staples and Nails

Industrial staple 92 Series

18^{GA}
STAPLE




Finish: Galvanized/ Galv.yellow/ss
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
8.6mm	1.25mm	1mm	10-40mm	5m

Brad Nails (Straight finish) F Series

18^{GA}
STAPLE

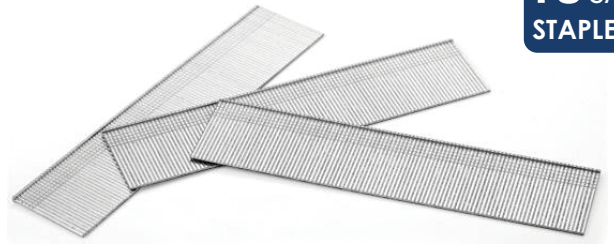


Finish: Galvanized/ SS
Point: Chisef point

HEAD WIDTH	WIDTH	THICKNESS	LEG	PCS/BOX
2mm	1.25mm	1mm	10-50mm	5m

Carton Closing Staples 35 Series

16^{GA}
CARTON



Finish: Galvanized and Coppeicoated
Point: Chisef point

CROWN	WIDTH	THICKNESS	LEG	PCS/BOX
35mm	2.25mm	0.82mm	15-22mm	2m

C Hog Rings


15^{GA}
Rings



CROWN	WIDTH	THICKNESS	PCS/BOX
23.9mm	1.8mm	1.8mm	10m

Straight Brads T Series


16^{GA}
STAPLE

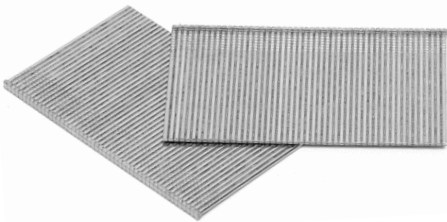

HEAD WIDTH	WIDTH	THICKNESS	LEG	PCS/BOX
2.80mm	1.58mm	1.30mm	20-64mm	2.5m

Concrete Nails ST Series


14^{GA}
STAPLE

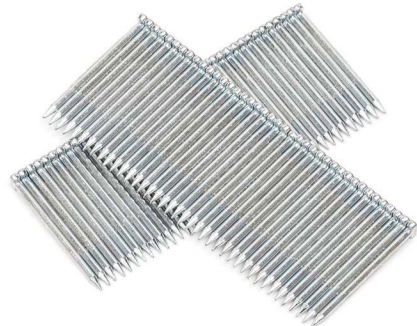

HEAD WIDTH	WIDTH	THICKNESS	LEG	PCS/BOX
6mm	2.1mm	2.1mm	15-64mm	1m




Brad Pins P6 Series



23^{GA}
PIN

WIDTH	THICKNESS	LEG	PCS/BOX
0.64mm	0.64mm	4-50mm	10m

Brad Nails (Straight finish) F Series

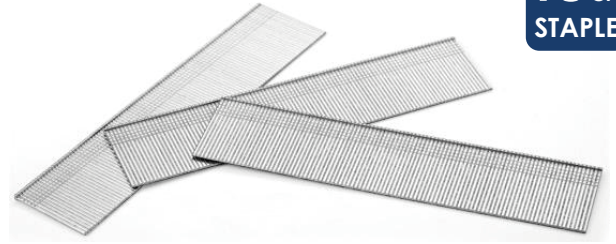


18^{GA}
STAPLE

Finish: Galvanized/ SS
Point: Chisef point

HEAD WIDTH	WIDTH	THICKNESS	LEG	PCS/BOX
2mm	1.25mm	1mm	10-50mm	5m

Check Our Range

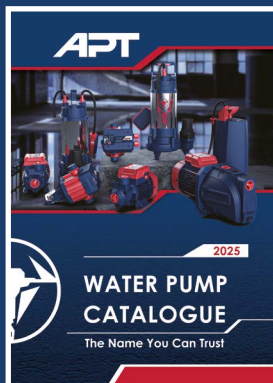


APT

The Name You Can Trust



APT

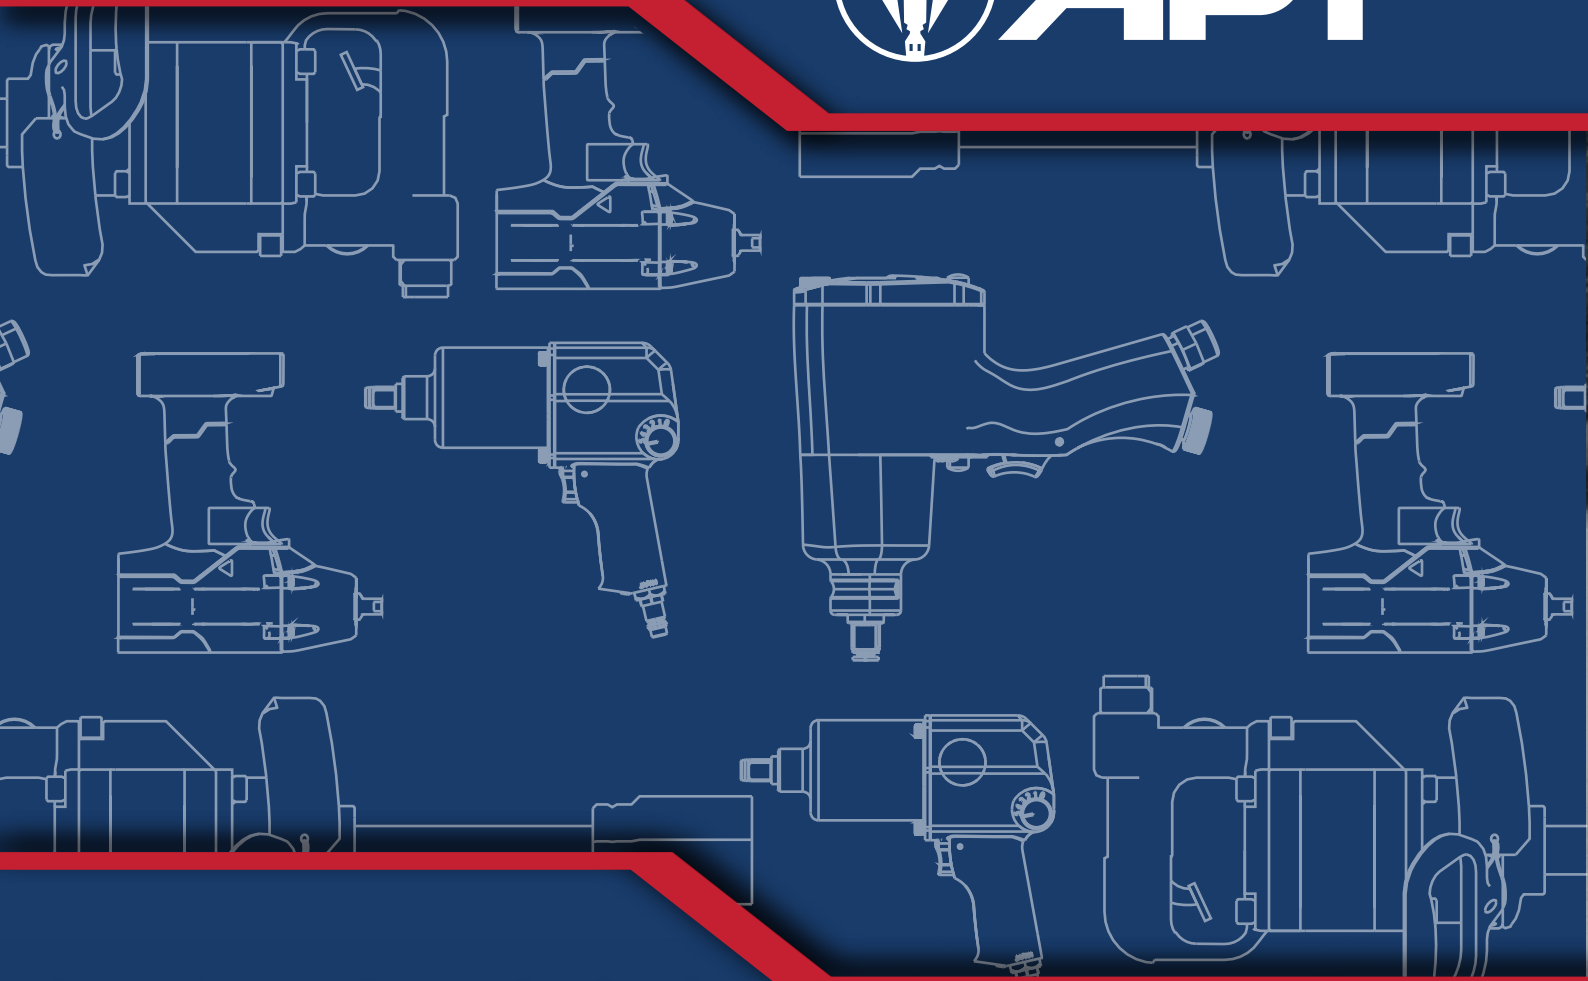

Contact Us



Info@apt-international.com

